




PLASTIQUE

PR.INT.01

16A 230V 3680W MAX IP20 porte ouverte IP44 porte fermée

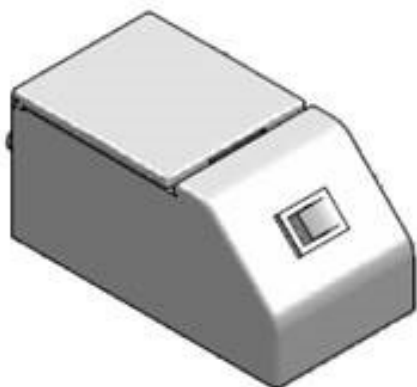

A1

A2

A3

A4

A5

A6

A7

A8

OK

Nota: la puerta del camerino debe ser cerrada después de la instalación para asegurar el cumplimiento del IP44.
Note: the door of the cabinet must be shut after installation in order to guarantee IP44.
Note: la porte vestiaire doit être fermée après l'installation pour assurer la conformité IP44.

NO

Nota: el camerino con la puerta abierta es IP20.
Note: the cabinet with open door is IP20.
Nota: avec la porte ouverte la norme deviendrais IP20.

B

1. Turn the switch OFF.
2. Strip the wires (8mm) and connect them to the terminals (L, N, T.T.).
3. Connect the ground wire to the ground terminal.
4. Tighten the terminal screws.
5. Check the wiring connections.
6. Connect the door latch mechanism.
7. Tighten the latch screws.
8. Close the door at a 90-degree angle.
9. Turn the switch ON.

